


Product Datasheet

CFX1020

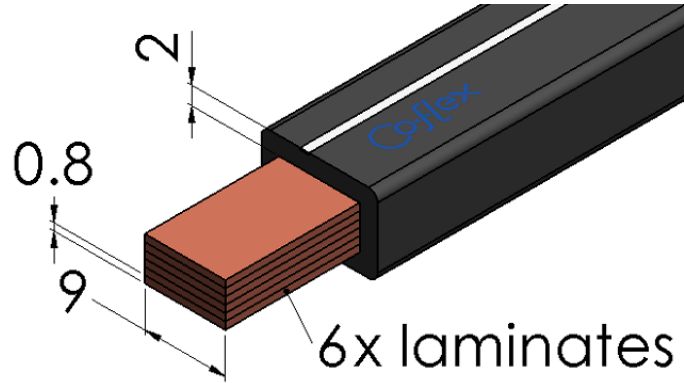

Main

Family	Insulated copper flexible bars
Version	Coflex
Standard length (m)	2
Width (mm)	9
Code	CFX1020
Reference	CFX 6X9X0,8
Number per package	6
Weight (kg)	0.9
Cross section (mm ²)	43.2

In (A) vs ΔT	Rated Intensity (A)	Temperature rise ΔT
	201	35 °C
	230	45 °C
	257	55 °C
	292	70 °C

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Technical Features

Conductor

Electrolytic copper: Cu-ETP – EN 13599

Laminate thickness: 0.8 mm

Insulation

PVC compound

Self-extinguishing PVC UL 94-V0

Black color with white line

Thickness: 2 mm ± 0.2

Dielectric strength: 20 kV/mm

Class II according to Par. 8.4.4 IEC 61439-1

Recyclable

Finished Product

Rated voltage: 1000 V AC/1500 V DC

Working temperature: -40 °C to 105 °C

In vs. ΔT

I_n = Rated current A

ΔT = Temperature rise °C

$\Delta T = T_f - T_a$

T_f = Working temperature °C

T_a = Room temperature °C

Table of ampacities (A) are based on temperature rise ΔT as per **IEC 61439-1** with reference room temperature of 35°C.

For derating coefficient for the use of bars in parallel please refer to the catalogue.

Please contact Teknomega for non-specified tolerances.