


Product Datasheet

CPH2101

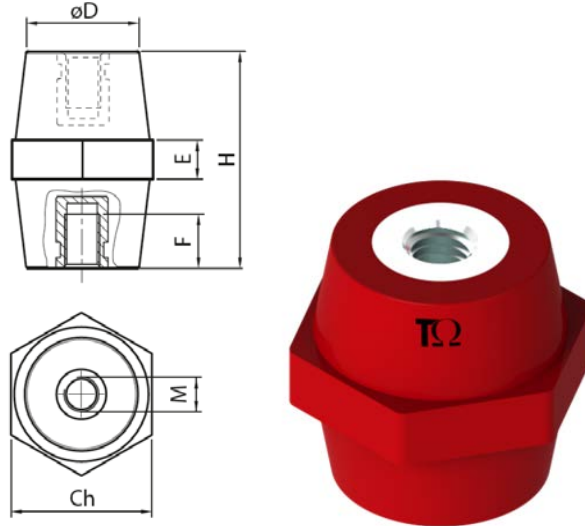

Main

Family	Low voltage insulators	
Version	Insulators in polyester	
Code	CPH2101	
Reference	CPH 70M10	
Number per package	4	
Weight (kg)	0.409	
Dimensions (mm)	H=70 Ch=60 D=52 E=14 F=20	
Type	Hexagonal	
Thread Size	M10	
Force Characteristics	Tightening torque*	50 Nm
	Tensile strength	15 kN
	Compressive strength	170 kN
	Flexural strength	8 kN

*Maximum tightening torque value suggested for 8.8 class screws

Technical Characteristics

Insulation

Thermosetting polyester reinforced with fiberglass

Self-extinguishing: UL94-V0

Color: red RAL 3031


Threaded Inserts

Galvanized steel

Finished product

Rated voltage: 1000 V AC/1500 V DC

Working temperature: -40 ÷ 130 °C

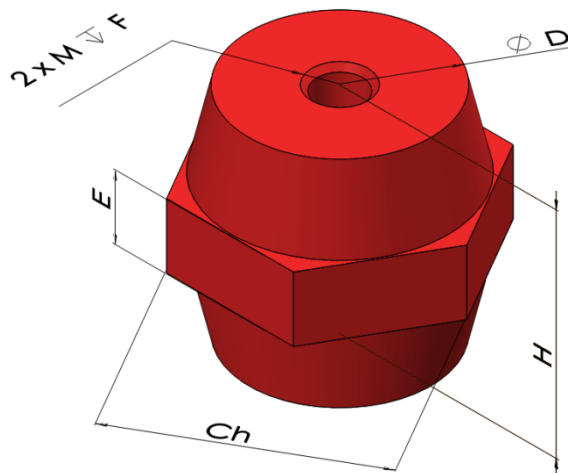

Please contact Teknomega for non-specified tolerances