


## Product Datasheet

### FLT1000

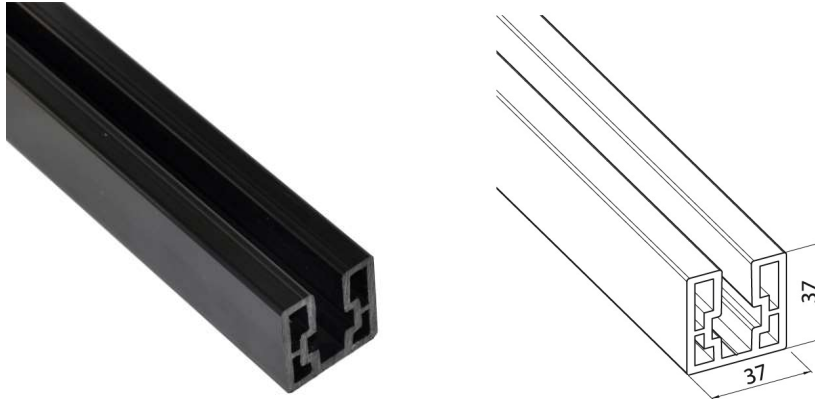

The Ω FLAT bar support is a **UNIVERSAL, QUICK and CONVENIENT** solution for supporting bars, copper or aluminium. In a flat configuration.

It is mainly made of two elements:

- 1) Supporting and fastening profile
- 2) Set of blocks and screws to tighten the bars

The Ω FLAT bar support can also be used as a support system for flexible insulated bars COFLEX and J-LINK.

#### Main

Family	Bar supports
Version	Support rail
Code	FLT1000
Reference	FLT PR 2000
Number per package	2
Weight (kg)	1.90
Length (m)	2

## Technical Features

### Support Rail

Rated Voltage: 1000 V AC / 1500 V DC

Made in extruded PVC

Self-extinguishing UL94-V0


Black color

One single code for all configurations

2 meters long

Working temperature up to 85 °C

Quick fitting to the panel board structure by means of hex socket head cap screws M6x25, to be used after punching the bottom guiding rail.

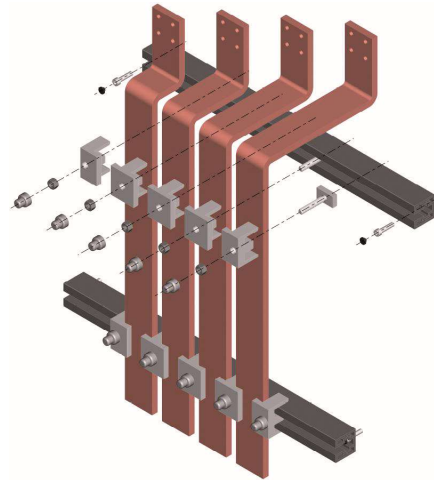


## Certifications

Compliant with standard IEC 61439-2

Tested in ACAE laboratory IA01

CERTIFICATES ACAE-LOVAG No. IT 10.003

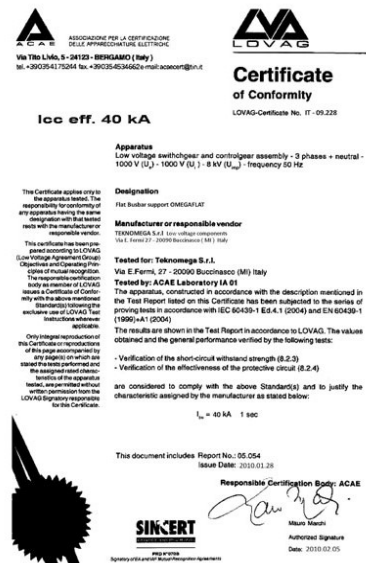

Please contact Teknomega for non-specified tolerances.