


Product Datasheet

GFV1000

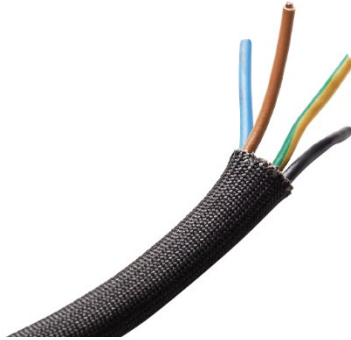

Main

Family	Wiring sleeves
Version	Fiberglass braided sleeve
Code	GFV1000
Reference	GFV 04
Length (m)	100
Ø internal (mm)	4

Technical Features

Material: Fibreglass impregnated with water-based paint

Color: Black

Breaking voltage: 2500 V

Working temperature: -30 °C ... +250 °C

Good flexibility

Resistant to most chemical agents

Insulator up to 1000 V

Packaging: coil

Cutting tool: UTG tools or scissors

THE RANGE - APPLICATIONS AND ADVANTAGES

- made from woven glass fibre filament to form a tubular structure subsequently impregnated in a water-based varnish
- high resistance to and protection against hot temperature
- good mechanical resistance to abrasion and to chemical agents
- non-flammable
- resistant to thermal shock
- high flexibility

Please contact Teknomega for non-specified tolerances.