


Product Datasheet

GFV1005

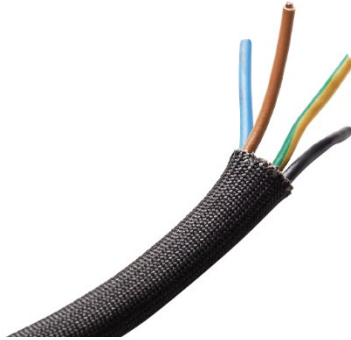

Main

| | |
|-----------------|---------------------------|
| Family | Wiring sleeves |
| Version | Fiberglass braided sleeve |
| Code | GFV1005 |
| Reference | GFV 06 |
| Length (m) | 100 |
| Ø internal (mm) | 6 |

Technical Features

Material: Fibreglass impregnated with water-based paint

Color: Black

Breaking voltage: 2500 V

Working temperature: -30 °C ... +250 °C

Good flexibility

Resistant to most chemical agents

Insulator up to 1000 V

Packaging: coil

Cutting tool: UTG tools or scissors

THE RANGE - APPLICATIONS AND ADVANTAGES

- made from woven glass fibre filament to form a tubular structure subsequently impregnated in a water-based varnish
- high resistance to and protection against hot temperature
- good mechanical resistance to abrasion and to chemical agents
- non-flammable
- resistant to thermal shock
- high flexibility

Please contact Teknomega for non-specified tolerances.