


## Product Datasheet

### GFV1030

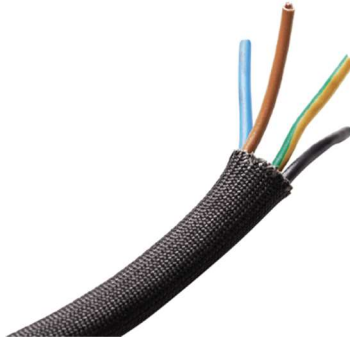

#### Main

Family	Wiring sleeves
Version	Fiberglass braided sleeve
Code	GFV1030
Reference	GFV 20
Length (m)	50
Ø internal (mm)	20

#### Technical Features

**Material:** Fibreglass impregnated with water-based paint

**Color:** Black

**Breaking voltage:** 2500 V

**Working temperature:** -30 °C ... +250 °C

Good flexibility

Resistant to most chemical agents

Insulator up to 1000 V

**Packaging:** coil

**Cutting tool:** UTG tools or scissors

## THE RANGE - APPLICATIONS AND ADVANTAGES

- made from woven glass fibre filament to form a tubular structure subsequently impregnated in a water-based varnish
- high resistance to and protection against hot temperature
- good mechanical resistance to abrasion and to chemical agents
- non-flammable
- resistant to thermal shock
- high flexibility

Please contact Teknomega for non-specified tolerances.