


## Product Datasheet

### GPG2010

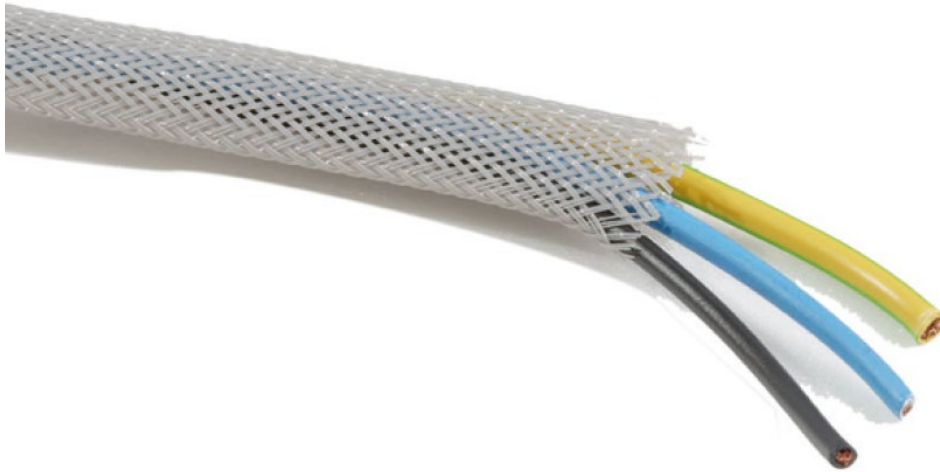

#### Main

Family	Wiring sleeves
Version	Polyester braided sleeve UL 94-V2 – Grey color
Code	GPG2010
Reference	GPG 10G
Length (m)	100
Flat width (mm)	10
Ø min (mm)	7
Ø max (mm)	19

### Technical Features

**Color: Grey**

Compliant with RoHS

Halogen-free polyester (PET) monofilament

Diameter 0.22 mm

**Density:** 1.14 kg/dm<sup>3</sup>

**Working temperature:** -40 °C to +150 °C

**Melting temperature:** 230± 5°C

**Self-extinguishing:** UL 94-V2

**Packaging:** coil in cardboard box self-reeling from the center

### THE RANGE - APPLICATIONS AND ADVANTAGES

- made of braided polyester monofilament to form a tubular structure
- for all electric cable wiring applications
- high expandibility value
- limited number of references
- excellent resistance to abrasion and to chemical agents
- excellent mechanical protection of conductors
- halogen-free
- can be cut with UTG tools

Please contact Teknomega for non-specified tolerances.