

## Product Datasheet

### GSL1005



#### Main

Family	Wiring sleeves
Version	Fiberglass coated with silicone rubber
Code	GSL1005
Reference	GSL 06
Length (m)	100
Ø internal (mm)	6

## Technical Features

**Material:** Silicone + internal fiberglass reinforcement

**Color:** red

**Breaking voltage:** 2500 V

**Working temperature:** -60 °C + 250 °C

Insulator up to 2500 V

Sleeve according to CEI EN 60684

Good expandability and elasticity


Good UV resistance

**Packaging:** coil with transparent film

**Cutting tool:** scissors

## THE RANGE - APPLICATIONS AND ADVANTAGES

- made of fiberglass coated with rubber silicone
- for all electric cable wiring applications providing excellent electrical insulation and resistance to high operating temperatures
- good UV resistance
- good expandability
- impermeable to water
- halogen-free
- good flexibility

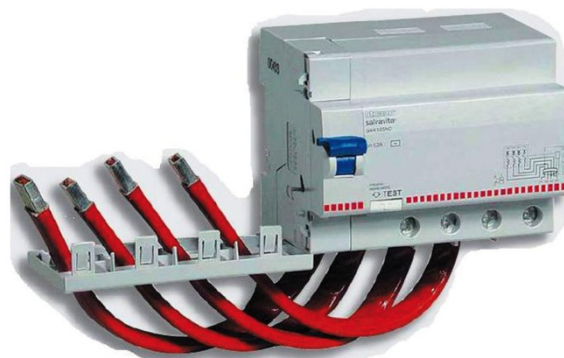

Please contact Teknomega for non-specified tolerances.