


Product Datasheet

ISO2120

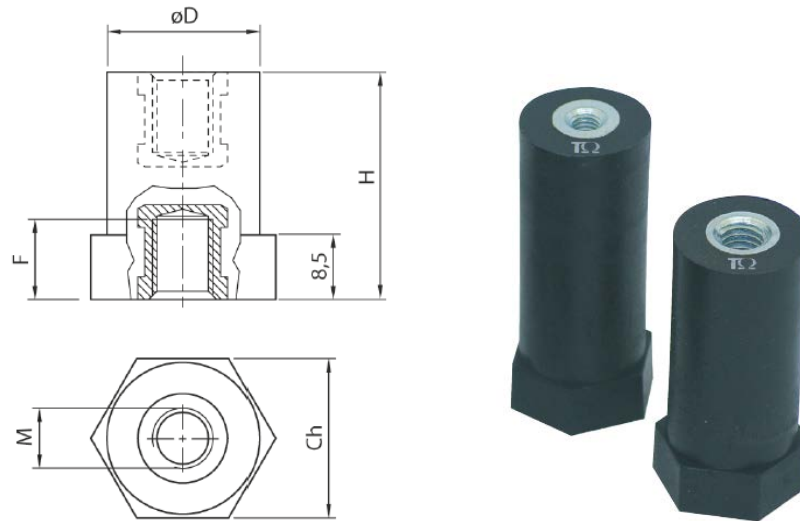

Main

Family	Low voltage insulators	
Version	Spacing columns in polyamide	
Code	ISO2120	
Reference	CLN 16M4-20	
Number per package	50	
Weight (Kg)	0.014	
Dimensions (mm)	H=16 Ch=21 D=20 F=4	
Type	Hexagonal	
Thread Size	M4	
Force Characteristics	Tightening torque*	3 Nm
	Tensile strength	2 kN
	Compressive strength	42 kN
	Flexural strength	1 kN

*Maximum tightening torque value suggested for 8.8 class screws

Technical Characteristics

Insulation

Polyamide 6,6 reinforced with 35% fiberglass

Halogen Free

Self-extinguishing: UL 94-V0

Glow Wire Flammability Index: 960 °C

1,5% moisture absorption as per ISO 62

Color: black

Threaded Inserts


Galvanized steel

Finished product

Rated voltage: 1000 V AC/1500 V DC

Working temperature: -40 ÷ 125 °C

UL Recognized with file n° 300607

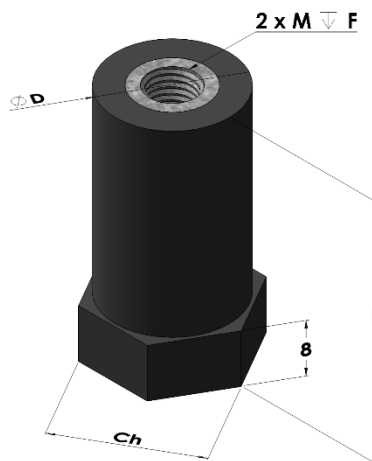

Please contact Teknomega for non-specified tolerances.