


## Product Datasheet

### ISO2295

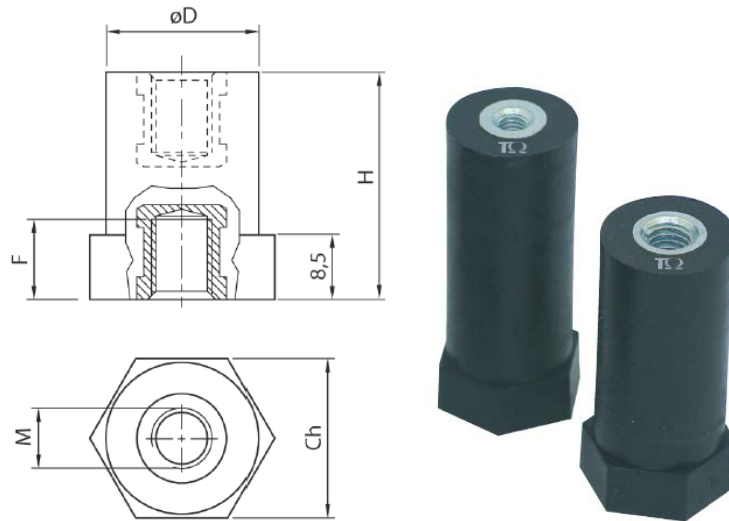

#### Main

Family	Low voltage insulators	
Version	Spacing columns in polyamide	
Code	ISO2295	
Reference	CLN 70M8-30	
Number per package	25	
Weight (Kg)	0.098	
Dimensions (mm)	H=70 Ch=30 D=30 F=15	
Type	Hexagonal	
Thread Size	M8	
Force Characteristics	Tightening torque*	25 Nm
	Tensile strength	9 kN
	Compressive strength	65 kN
	Flexural strength	2.8 kN

\*Maximum tightening torque value suggested for 8.8 class screws

## Technical Characteristics

### Insulation

Polyamide 6,6 reinforced with 35% fiberglass

Halogen Free

Self-extinguishing: UL 94-V0

Glow Wire Flammability Index: 960 °C

1,5% moisture absorption as per ISO 62

Color: black

### Threaded Inserts


Galvanized steel

### Finished product

**Rated voltage:** 1000 V AC/1500 V DC

**Working temperature:** -40 ÷ 125 °C

UL Recognized with file n° 300607

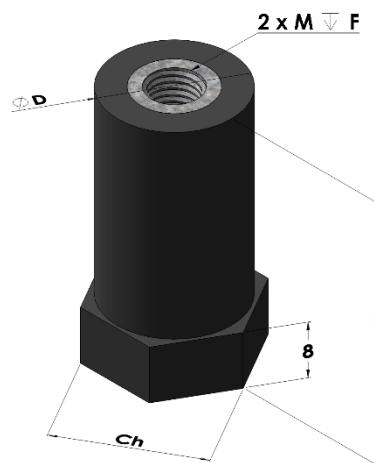

Please contact Teknomega for non-specified tolerances.