


# Product Datasheet

## JLK5098

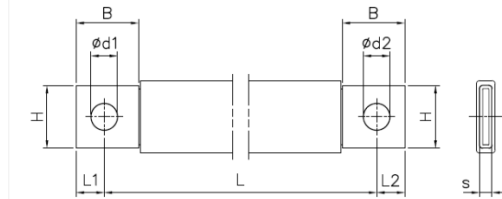

### Main

Family	Insulated copper braided shunts	
Version	J-link Plus	
Code	JLK5098	
Reference	JLP 120-1030	
Number per package	2	
Weight (kg)	1.55	
L: Hole to hole length (mm)	$630^{+5.6}_{-0.6}$	
Cross section (mm <sup>2</sup> )	120	
Dimensions (mm)	$B = 30^{+0.5}_{-0.5}$ , $H = 30^{+0.5}_{-0.5}$ , $L1 = 11^{+0.3}_{-0.3}$ , $L2 = 15^{+0.3}_{-0.3}$ , $d1=10.5^{+0.3}_{-0.3}$ , $d2=10.5^{+0.3}_{-0.3}$ , $s=7.5^{+0.5}_{-0.5}$	
In (A) vs ΔT (°C)	Rated Intensity (A)	Temperature rise ΔT
	383	35 °C
	482	55 °C
	543	70 °C
	658	105 °C

## **Technical Features**

### **Conductor**

Tinned electrolytic copper braid Cu-ETP

99.90%

Standard wire: 0.20 mm

Terminal in tinned copper tube

### **Insulation**

TPE Compound

Black color with a light blue

Low smoke emission

Self-extinguishing UL 94-V0

Thickness:  $1.9 \pm 0.1$  mm

Halogen-free

Class II according to Par. 8.4.4 IEC 61439-1

Recyclable

### **Finished Product**

Dielectric rigidity: 20 kV/mm

Rated voltage: 1000 V AC/1500 V DC

Working temperature: -40 °C to 140 °C

### **In vs. $\Delta T$**

$I_n$  = Rated current A

$\Delta T$  = Temperature rise °C

Standard IEC 61439-1

Reference Room temperature is 35 °C

For derating coefficient for the use of bars in parallel please refer to the catalogue.

Please contact Teknomega for non-specified tolerances.