


## Product Datasheet

### MRS3500

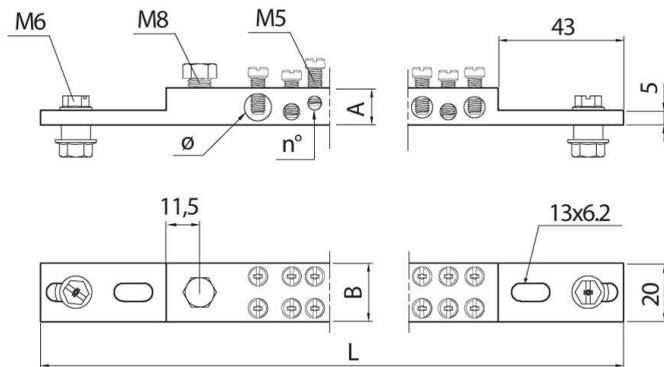

#### Main

Family	Earthing and Neutral Terminals
Version	Double earthing terminal
Code	MRS3500
Reference	MRS 2X41
Number per package	1
Weight (kg)	0.85
L (mm)	462
A (mm)	13
B (mm)	20
Rated Current (A)	300

#### Holes

Ø (mm)	n° holes	Stripped wire (mm <sup>2</sup> )	Wire with ferrule (mm <sup>2</sup> )	Torque (Nm)
9.1	2 x 1	16 ÷ 35	10 ÷ 35	2
7.0	2 x 7	4 ÷ 16	2.5 ÷ 16	2
5.3	2 x 19	2.5 ÷ 6	1.5 ÷ 6	1.5
4.5	2 x 14	1.5 ÷ 4	0.75 ÷ 4	1.5

## Technical Features


**Material:** Brass, electrical conductivity 28% IACS

Two rows of connections with blind holes


Connection with cable lug up to 95 mm<sup>2</sup>

Universal fixing with oblong holes: direct fixing, fixing on copper bar, fixing on spacers and extension two connectors

Complete with M6 fixing screws, M8 screws for eyelet terminals and M5 galvanized steel connection screws

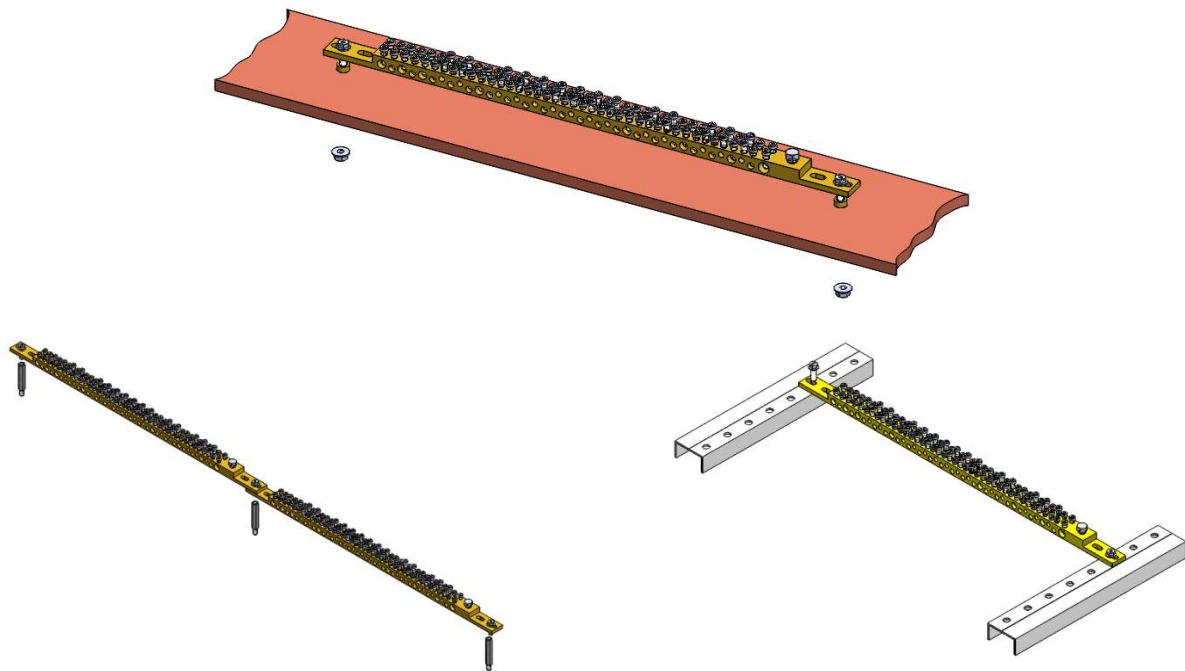

Fixing on copper bars, on profiles and on extensions

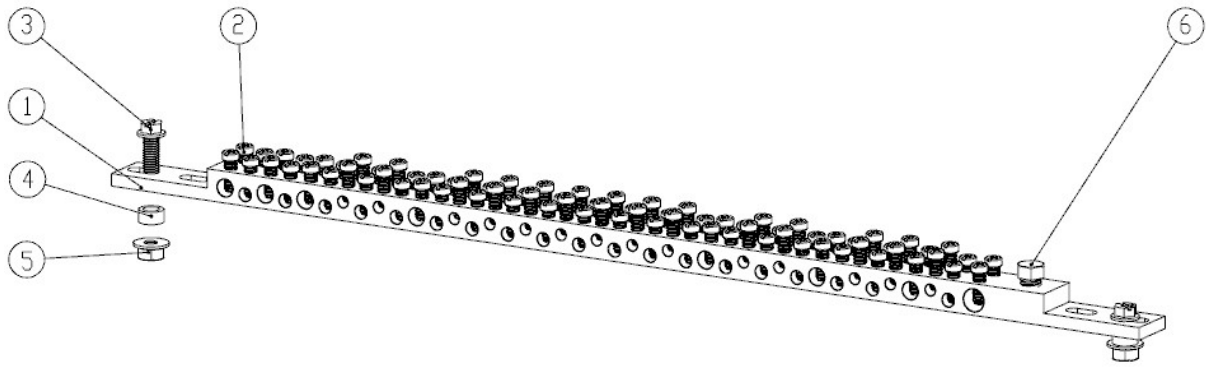

Position	Description	No.
1	Brass bar double row 41 holes	1
2	PH with slot head screw M5X12.5	82
3	Hexagon flange screw M6X16	2
4	Sleeve bushing M6	2
5	Hexagon flange nut M6	2
6	Hexagon screw SW10 M8X16	1

Please contact Teknomega for non-specified tolerances.