


## Product Datasheet PRP1010

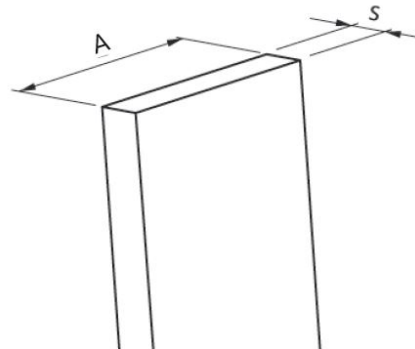

### Main

Family	Copper and Aluminium busbars		
Version	Solid copper bars		
Standard length (mm)	4200		
Code	PRP1010		
Reference	PRP 30x5		
Number per package	1		
Weight (kg/m)	1.33		
A (mm)	30		
s (mm)	5		
Cross section (mm <sup>2</sup> )	150		
In (A) vs $\Delta T^*$	In (A)	$\Delta T$	
	425	35 °C	
	<b>545</b>	<b>55 °C</b>	
	621	70 °C	
	769	105 °C	

\*Table of ampacities (A) are based on temperature rise  $\Delta T$  with reference room temperature of 35 °C

## Technical Features

### **Copper bars**

Electrolytic copper Cu-ETP 99.90%

Rounded corners

**Tensile strength:** 250 N/mm<sup>2</sup>

**Resistivity:** 0.0172 Ω mm<sup>2</sup>/m

**Density:** 8.9 kg/dm<sup>3</sup>



For derating coefficient for the use of bars in parallel please refer to the catalogue.

Please contact Teknomega for non-specified tolerances.