


## Product Datasheet

### PSP1000

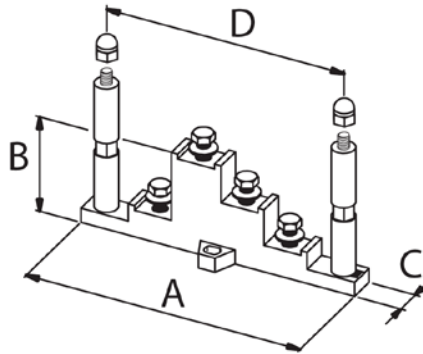

M6 screws for bar fastening included for PSP1000

Protection screen fastening kit included for PSP1000 (cf. code DZP2000)

#### Main

Family	Repartition supports
Version	Repartition supports
Code	PSP1000
Reference	PSP 250
Number per package	8
Type	T+N
A (mm)	150
B (mm)	54
C (mm)	15
D (mm)	130

### Technical Features

Polyamide 6,6 reinforced with 35% fiberglass

Self-extinguishing UL 94-V0

Working temperature: -40°C to + 130°C

Glow wire test GWFI: 960/1-2 °C/mm

Comparative Tracking Index CTI: 400 V

Black color




### Distance between supports depending on Icc (short-circuit current)

**Icc pk** = Short-circuit current peak value expressed in kA

**Icc rms** = Effective value of short-circuit current, duration equal to 1 second, expressed in kA

Code	Bar cross-section	Icc pk (kA)	11.9	13.6	24	30	48.3
		Icc rms (kA)	7	8	12	15	23
		In (A)	Distance (mm)				
PSP1000	15x5	160	560	450	250	150	-
	20x5	250	640	520	260	150	-

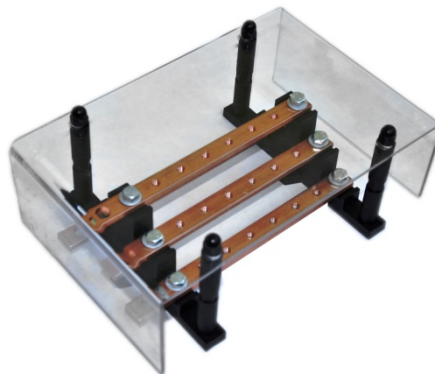

Example of use

Please contact Teknomega for non-specified tolerances.