


Product Datasheet

PSP1010

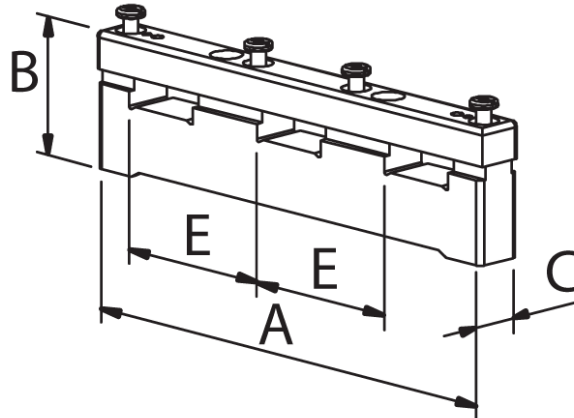

Main

Family	Repartition supports
Version	Repartition supports
Code	PSP1010
Reference	PSP 630T
Number per package	1
Type	T
A (mm)	180
B (mm)	55
C (mm)	18
E (mm)	60

Technical Features

Polyamide 6,6 reinforced with 25% fiberglass

Self-extinguishing UL 94-V0

Working temperature: -40°C to + 130°C

Glow wire test: 960°C

Comparative Tracking Index CTI: 350 V

Black color



Distance between supports depending on Icc (short-circuit current)

Icc pk = Short-circuit current peak value expressed in kA

Icc rms = Effective value of short-circuit current, duration equal to 1 second, expressed in kA

Code	Bar cross-section	Icc pk (kA)	30	34	44.1	50.4	54.6	60.9	75.6
		Icc rms (kA)	15	17	21	24	26	29	36
		In (A)	Distance (mm)						
PSP1010	20x5	250	600	-	400	-	200*	-	-
	20x10	500	-	600	-	400	-	200*	-
	30x5	400	-	-	600	-	-	400	200*
	30x10	630	-	-	600	-	-	400	200

*Icc rms = Effective value of short-circuit current, duration equal to 0.4 seconds, expressed in kA.

Please contact Teknomega for non-specified tolerances.