


## Product Datasheet

### TMS1065

The copper braid is used as a super flexible conductor for all electric connection requirements, including power, earthing and equipotential connections.

It results from the use of a number of standard wires with diameter of 0.20 mm, twined together to form a cord.

More cords twined together can produce a small cross-sectioned braid or further secondary cords which, twined again, make it possible to get the desired cross-section.

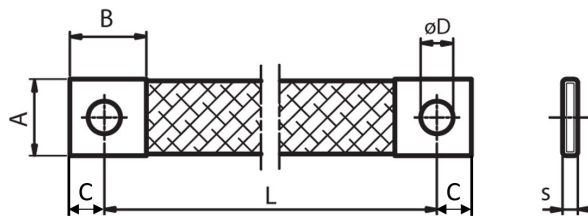

#### Main

|                          |                                     |
|--------------------------|-------------------------------------|
| Family                   | Prefabricated earthing braids       |
| Version                  | Flat tinned copper earthing braids  |
| Code                     | TMS1065                             |
| Reference                | TMS 25-250-10                       |
| Type                     | Flat                                |
| Number per package       | 10                                  |
| Weight (kg)              | 0.072                               |
| Current (A)*             | 152                                 |
| Sect. (mm <sup>2</sup> ) | 25                                  |
| S (mm)                   | 2.8 <sup>+0.5</sup> <sub>-0.5</sub> |
| L (mm)                   | 250 <sup>+11</sup> <sub>-1</sub>    |
| A (mm)                   | 21 <sup>+0.5</sup> <sub>-0.5</sub>  |

|        |                      |
|--------|----------------------|
| B (mm) | $22^{+1}_{-1}$       |
| C (mm) | $11^{+0.5}_{-0.5}$   |
| D (mm) | $10.5^{+0.5}_{-0.5}$ |

\* Current calculated with a temperature rise  $\Delta T=35$  °C respect to a reference room temperature of 35 °C

### Technical Features

**Material:** tinned copper Cu-ETP 99.90% EN 13602

Standard wire  $\varnothing$  0.20 mm

**Resistivity:** 0.0172  $\Omega$  mm<sup>2</sup>/m

Compliant to EN 45545-2 for railway applications



### Flat type copper braids

Flat type made using the same process as in tubular braids, but flattening it between rollers to the desired dimensions.

It is used for power, earthing and equipotential connections.

In power applications, it makes flexible connections which easily compensate offsets between elements to be interconnected, and also provides excellent buffering of vibrations induced by, i.e., connection to a transformer.

With the same cross-section, it can take a higher current density than cables or copper bars.

Please contact Teknomega for non-specified tolerances.