


Product Datasheet

TOP2000

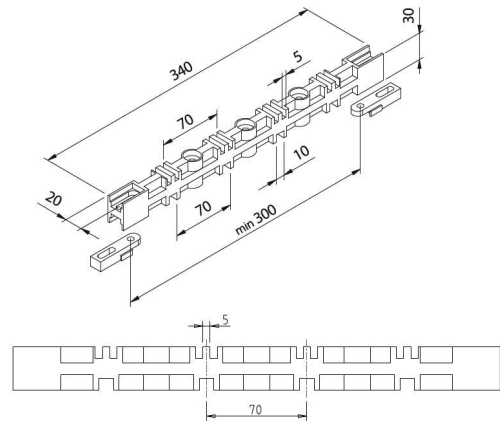


Main

Family	Bar supports	
Version	Ω TOP JUNIOR - Compact bar support	
Code	TOP2000	
Reference	TOP J 5-10	
Number per package	2	
Type	T + N 2/5	T + N 1/10
No. of tie-rods	3	3
No. of bars	1 - 2	1
s (mm)	5	10
H min ÷ max (mm)	30 ÷ 80	30 ÷ 80

Technical Features

- Rated Voltage: 1000 V AC / 1500 V DC
- High versatility
- Space between phases 70 mm
- High resistance to short-circuit
- Unique solution for supporting 5 and 10 mm thick bars
- Fitting directly on 400 mm deep panel boards
- Adjustable fasteners supplied
- Maximum working temperature: 125 °C


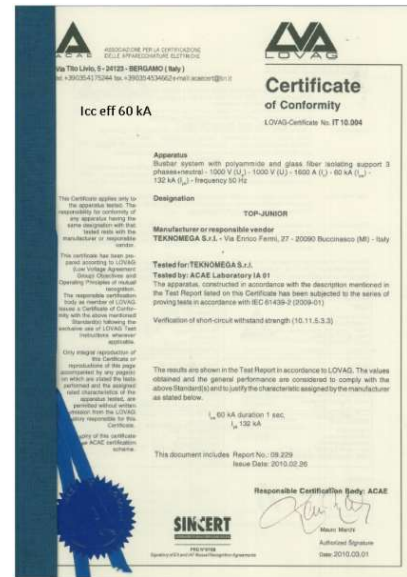


Insulating block:

- Polyamide 6,6 reinforced with 35% Fiberglass
- Self-extinguishing UL 94-V0
- Color: black

Certifications

- Compliant with standard IEC 61439-2
- Tested in ACAE laboratory IA01
CERTIFICATES ACAE-LOVAG No. IT 10.004

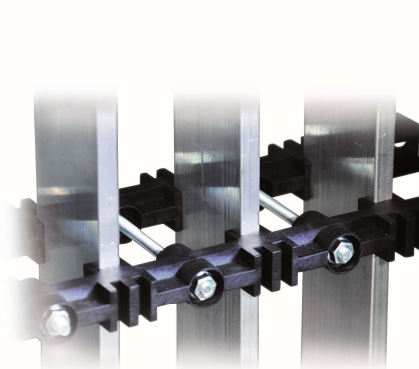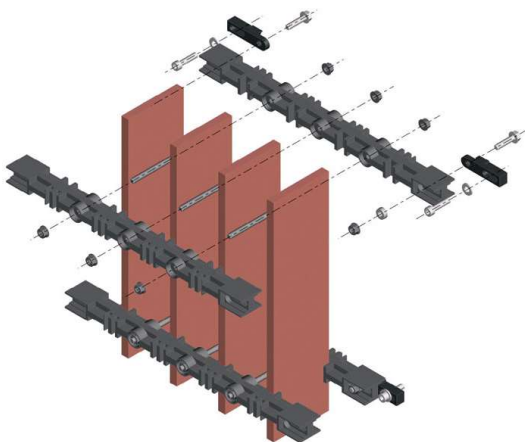

Please contact Teknomega for non-specified tolerances.