


Product Datasheet PSP1065

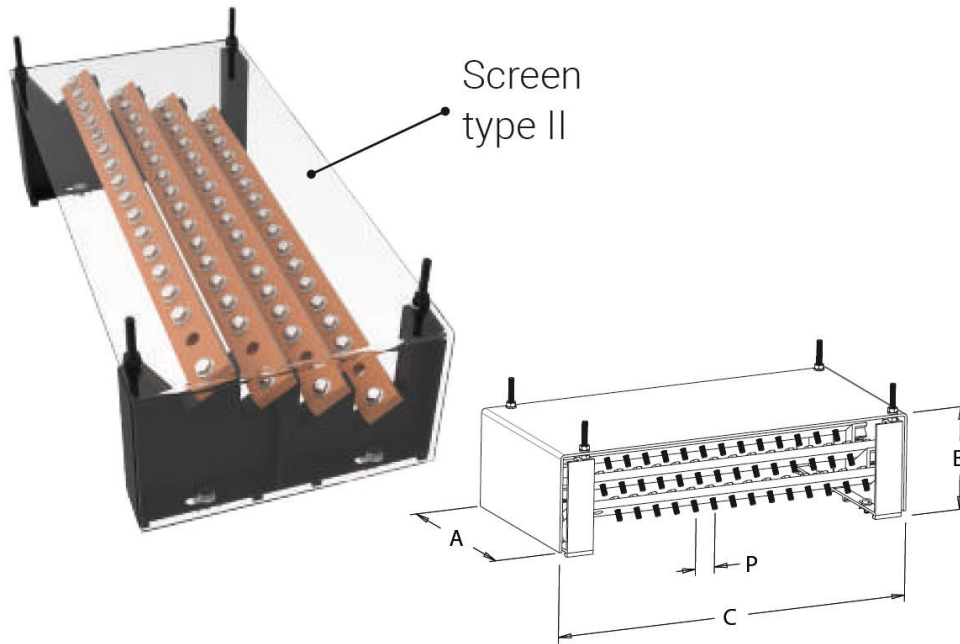

Main

| | | | | |
|--------------------|-----------------------------|----------|-------------------|--------|
| Family | Distribution blocks | | | |
| Version | Repartition supports in Kit | | | |
| Code | PSP1065 | | | |
| Reference | PSP 630K-45 | | | |
| Number per package | 1 | | | |
| In (A) | 630 | | | |
| Icc rms (kA) | 12 | | | |
| Bars cross-section | 30 x 10 | | | |
| Dimensions (mm) | A = 216, | B = 127, | C = 455, | P = 25 |
| Number of | Inputs = 1 x Ø 10.5, | | Outputs = 14 x M8 | |
| Type of support | PSP1005 | | | |
| No. Supports | 2 | | | |

The power inputs of distribution units in KITS form can be indifferently placed right or left.

Technical Features:

The KIT includes all that is needed to make the distribution unit, i.e. is made of:

4 Copper bars (see table Main for details)

Distribution unit supports


Support spacers for the protection screen

Protection screen already cut, bent and punched in the proper dimensions

-Type I: Front screen with top/bottom flaps

-Type II: Front and side screen

Screws

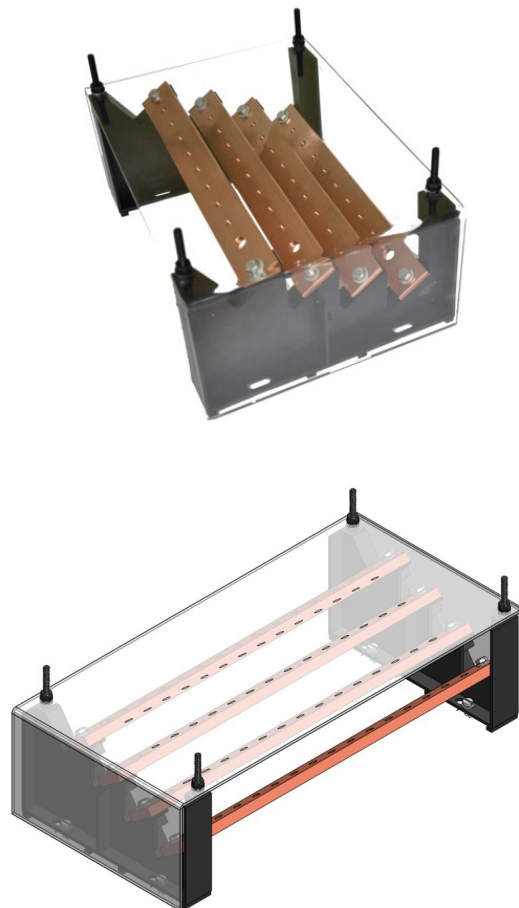

Please contact Teknomega for non-specified tolerances.